



TM Forum Specification

Recommendation API REST Specification

TMF680
Release 17.5.0
January 2018

Release: TM Forum Release 17.5.0	Status: Member Evaluation
Version: 1.0.2	IPR Mode: RAND

NOTICE

Copyright © TM Forum 2018. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to TM FORUM, except as needed for the purpose of developing any document or deliverable produced by a TM FORUM Collaboration Project Team (in which case the rules applicable to copyrights, as set forth in the [TM FORUM IPR Policy](#), must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by TM FORUM or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and TM FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Direct inquiries to the TM Forum office:

4 Century Drive, Suite 100

Parsippany, NJ 07054, USA

Tel No. +1 973 944 5100

Fax No. +1 973 944 5110

TM Forum Web Page: www.tmforum.org

TABLE OF CONTENTS

NOTICE.....	2
Table of Contents.....	3
List of Tables.....	4
Introduction	5
Mapping with SID ABE.....	6
Mapping with Business Process Framework (eTOM)	7
Difference between Recommendation API and other existing TMF APIs	8
SAMPLE USE CASES.....	9
RESOURCE MODEL.....	10
Managed Entity and Task Resource Models	10
Recommendation Resource.....	10
API OPERATION TEMPLATES	15
Get Recommendation.....	15
Acknowledgements.....	18
Version History.....	18
Release History.....	18
Contributors to Document.....	18

LIST OF TABLES

N/A

INTRODUCTION

The following document is the specification of the REST API for Recommendation. It includes the model definition as well as all available operations.

It provides a standardized mechanism for recommendation management such as creation, update, retrieval, deletion and notification of events.

Recommendation API manages the following data resources:

- **Recommendation**

- o Recommendation is a type of automated (typically, conditional) system action to determine which products offerings to be presented as up-sells, cross-sells, and related products to each customer segment based on customer and session specific information. The design-time offers and product recommendations may come from Marketing and Catalog. The run-time evaluation and presentment will be executed with contextual/session information. Normally, it supports the recommendation of the offer which is proper for the customer, provides Up-sell and cross-sell based on contextual and catalog rules.

Recommendation API is used to recommend offering quickly based on the history and real-time context of customer. It is a real-time and personalized recommendation API. It is usually provided by e-commerce or BSS, CRM system in omni-channel.

The typical example of recommendation is on the online e-commerce site.

The screenshot shows a user interface for a mobile service provider. At the top, there are navigation links: Shop, Explore, My Telco+, and Support. Below this, there are several sections:

- LAST BILL:** Shows a bill amount of €35.00 with a due date of Sep 30, 2016.
- PAYMENT STATUS:** Shows a green checkmark and the text "Great! There's no arrears!".
- RECOMMENDATION (highlighted with a red box):** This section contains two items:
 - Red Maxi:** A smartphone image with a price of €49.9.
 - Wal-Mart Carrefour:** A Walmart logo with a price of €100.
- RECHARGE:** A section with buttons for 10, 20, 30, 50, 100, 150, 200, and Other, followed by a "Recharge" button.
- USAGE:** A section with four circular gauges for Mobile Voice (0 Let), Data (8192 MB Let), Message (0 Let), and Wifi (0 Let). Below these is a banner that says "Mobile Voice is *not* enough? Just check the recommendation on the right >".
- BONUS TRAFFIC:** A section with the text "You have a chance to grab traffic." and a red envelope icon with "4G Open Click".

MAPPING WITH SID ABE


Recommendation is related to “*Product Domain::Product Offering ABE*” in TMF Information Framework (SID).

MAPPING WITH BUSINESS PROCESS FRAMEWORK (ETOM)

In Business Process Framework there is the description for promotion:

- Level 2 Process: 1.1.9 Selling
- Level 3 Process: 1.1.9.3 Cross/Up Selling
- Level 4 Process: 1.1.9.3.2 Recommend Appropriate Offerings

The description of “Recommend Appropriate Offerings” is to recommend the appropriate offering to the customer. It is the important approach to attract the customer and propel more revenue increase.

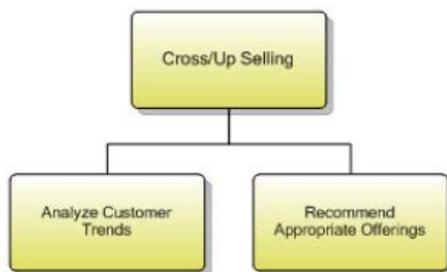

DIFFERENCE BETWEEN RECOMMENDATION API AND OTHER EXISTING TMF APIS

Here the differences between Recommendation API and other existing published TMF APIs are explained to clarify why this separate API is not covered simply with those APIs.

✓ **Difference with Product Catalog API**

Recommendation and Product Offering in the Product Catalog has some similarities. The product offering is the object which is recommended to the customer.

Product Catalog API focuses on the configuration of product offering. When querying with Product Catalog API, all the existing offerings will be included in the query result. Instead, recommendation API only fetches the offerings which possibly cause the interest of the customer.

✓ **Difference with Product Offering Qualification API**

Product Offering Qualification acquires the validated and available product offering for the customer to purchase. These offerings are all the allowed options for the customer.

Recommendation API provides the most possibly-chosen offering for the customer. Such offerings are selected for the customer as the first and primary choice, not only the normal sellable objects.

✓ **Difference with Shopping Cart API**

The Shopping Cart API is a container to load the selected offerings for the customer to purchase. It does not replace the recommendation.


The recommendation often accompanies with the shopping cart. Based on the selected offerings in the cart, the recommended offerings are shown nearby. But the recommendation is not done by the shopping cart itself.

The screenshot shows a shopping cart interface. On the left, under the heading "Shopping Cart", there is a table with columns for "Price" and "Quantity". The first item is "Sapiens: A Brief History of Humankind" by Yuval Noah Harari, priced at \$15.17 with a quantity of 1. Below the item name, it says "Paperback", "Available for Pre-order", and "Eligible for FREE Shipping". There is also a checkbox for "This is a gift" and links for "Delete" and "Save for later".

On the right, there is a section titled "Frequently Bought With Sapiens: A Brief History of Humankind". It features a book cover for "Homo Deus: A Brief History of Humankind" by Yuval Noah Harari, with a 4.5-star rating and 131 reviews. Below the cover, it says "Paperback" and "See all buying options".

SAMPLE USE CASES

Examples of use cases using Recommendation API is as following

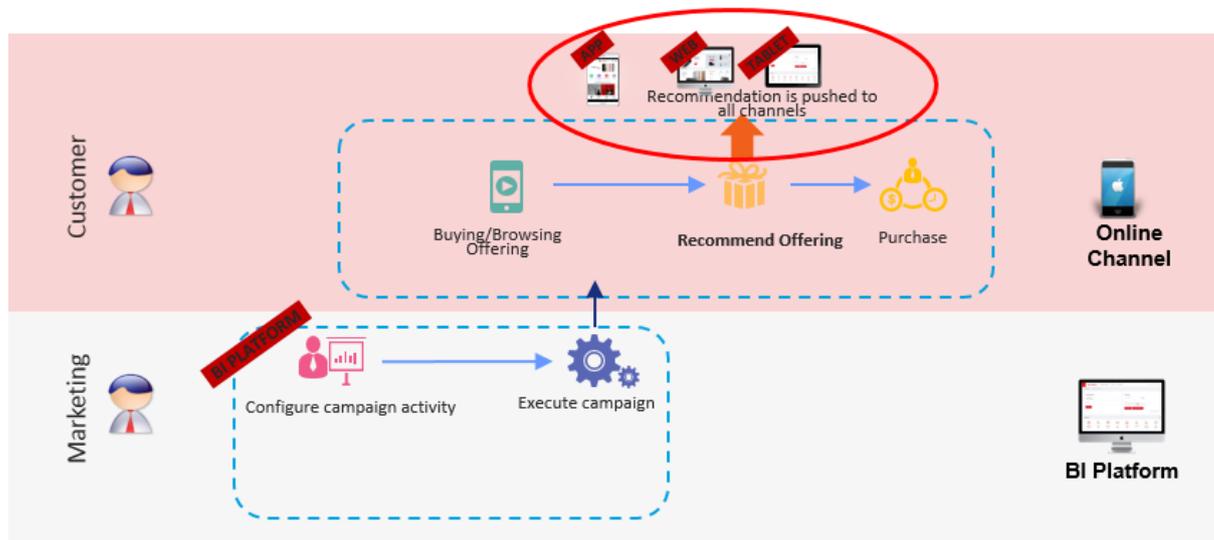


RESOURCE MODEL

Managed Entity and Task Resource Models

RECOMMENDATION RESOURCE

RECOMMENDATION RESOURCE MODEL:

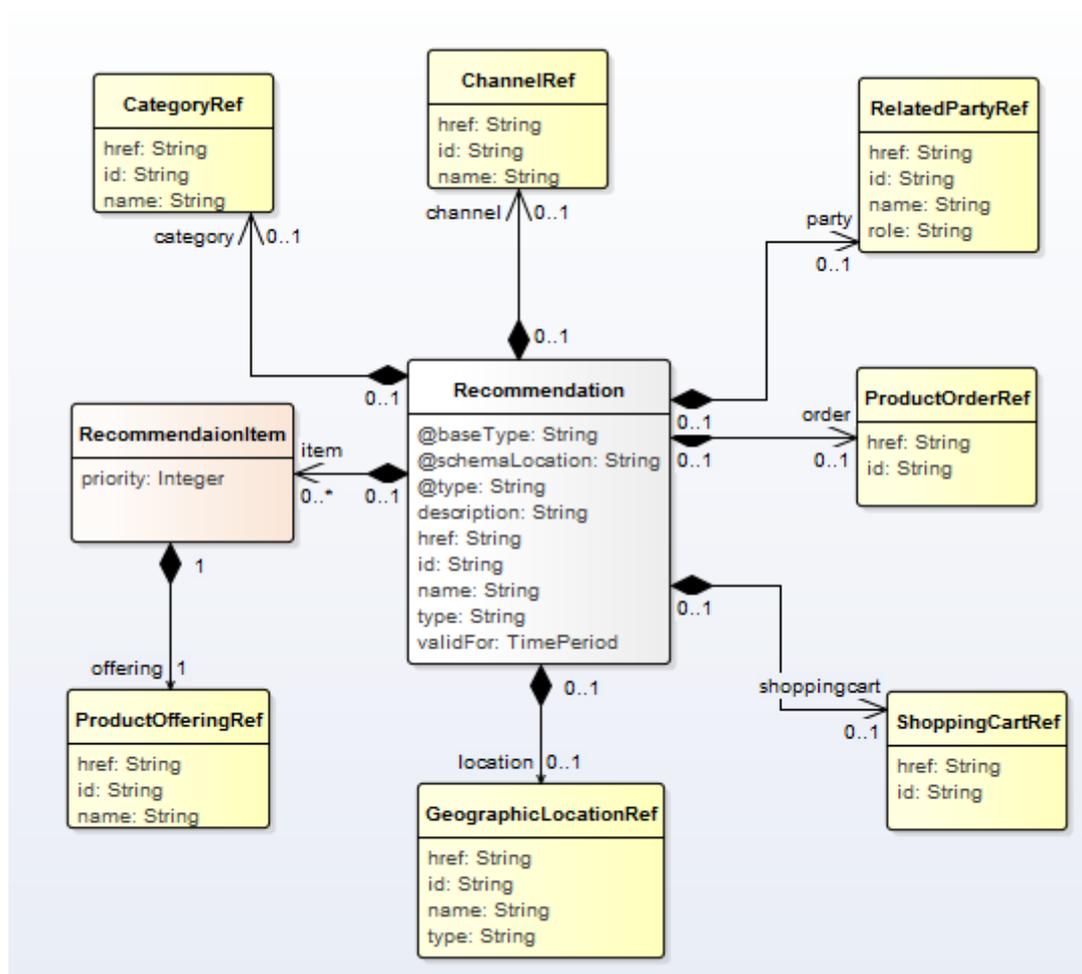

FIELD DESCRIPTIONS

Recommendation Resource

Parameter	Data Type	Description
@type	String	It indicates the class type of the catalog.
@schemaLocation	String	It provides the link to the schema describing REST resource
@baseType	String	It indicates the base type of REST resource.
description	String	Description of recommendation
id	String	Unique identifier of recommendation
href	String	Hypertext Reference of the recommendation.
name	String	Name of recommendation
validFor	TimePeriod	The period in which the recommendation is valid.
type	String	Category of recommendation. The basic type is: 'AD': it means the recommendation is the advertisement for display 'OFFER': it means the recommended content is the offer entry page. By clicking it, the user can be forwarded to the details of the offering
recommendationItem		A list of recommendation items. Every item is a product offering and its priority .
priority	Integer	Priority level for applying this alteration among all the defined alterations.
productOffering		ProductOfferingRef (ProductOfferingRef)Recommended Product offering
id	String	Unique identifier of product offering
href	String	Hypertext Reference of the product offering.
name	String	Name of the product offering.
category		Category (CategoryRef), Different kinds of recommendation. For example, it can be used to describe different recommendation positions on the e-commerce web site.
id	String	Unique identifier of category

Parameter	Data Type	Description
href	String	Hypertext Reference of the category.
name	String	Name of the category.
Channel		Channel(ChannelRef)The channel where the recommendation is used. May be online web, mobile app, social, etc.
Id	String	Unique identifier of channel
href	String	Hypertext Reference of the channel.
name	String	Name of the channel.
ShoppingCart		ShoppingCart (ShoppingCartRef). The shopping cart which the recommendation is related with.
Id	String	Unique identifier of shopping cart
href	String	Hypertext Reference of the shopping cart.
ProductOrder		ProductOrder (ProductOrder). The product order which the recommendation is related with.
Id	String	Unique identifier of product order
href	String	Hypertext Reference of the product order.
GeographicLocation		GeographicLocation (GeographicLocationRef) The geographic location which the recommendation is related with.
Id	String	Unique identifier of geographic location
href	String	Hypertext Reference of the geographic location.
name	String	Name of the geographic location.
type	String	Type of the geographic location.
relatedParty		relatedParty (relatedPartyRef). The party which the recommendation is related with.
Id	String	Unique identifier of related party
href	String	Hypertext Reference of the related party.
name	String	Name of the related party.

Parameter	Data Type	Description
role	String	Role of the related party.

RECOMMENDATION SAMPLE

```

{
  "id": "1001",
  "href": "http://serverlocation:port/recommendation/v1/recommendation/1001",
  "name": " recommendation of the latest Apple iPhone",
  "description": " recommendation of the latest Apple iPhone for the customer with high
revenue contribution",
  "@type": "recommendation",
  "@schemaLocation": "http://serverlocation:port/recommendation/schema/
recommendation.yml",
  "@baseType": "",
  "recommendationItem": [
    {
      "priority": 1,
      "productOffering": {
        "href": "https://host:port/productOffering/v1/productOfferings/6547",
        "id": "6547",
        "name": "phone1"
      }
    },
    {
      "priority": 2,
      "productOffering": {
        "href": "https://host:port/productOffering/v1/productOfferings/6547",
        "id": "6542",
        "name": " phone2"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2017-12-19 T04:00:00.OZ",
    "endDateTime": "2017-12-31 T20:42:23.OZ"
  },
  "type": "OFFER",
  "channel": {

```

```
"id": "13",
  "href": "http://serverlocation:port/recommendation/v1/channel/13",
  "name": "mobile app channel"
},
"relatedParty":
  {
    "id": "34",
    "href": "http://serverlocation:port/partyManagement/v1/individual/34",
    "name": "John Smith",
    "role": ""
  }
  "geographicLocation":{
    "id": "334"
  }
}
```

API OPERATION TEMPLATES

For every single of operation on the entities use the following templates and provide sample REST requests and responses.

Remember that the following Uniform Contract rules must be used:

Operation on Entities	Uniform API Operation	Description
Query Entities	GET Resource	GET must be used to retrieve a representation of a resource.

Filtering and attribute selection rules are described in the TMF REST Design Guidelines.

Get Recommendation

GET `/recommendation?fields=...&{filtering}`

Description:

- This operation is used to query recommendations by query conditions
- This operation is usually used by e-commerce client. When the client query recommendation, it will trigger the server to generate the recommendation quickly by Big Data analysis tech. or AI, Machine Learning tech. The server will response with the recommendation result.
- Attribute selection is enabled for all first level attributes.
- Attribute Filtering may be available depending on the compliance level supported by an implementation.

For example:

1. Get recommendations by relatedParty id and channel id

GET /recommendation?relatedParty.id=VALUE&channel.id=VALUE

2. Get recommendations by relatedParty id , channel id and shoppingcart id. Usually, we need to recommend specific offering when the customer change his shopping cart.

GET /recommendation?relatedParty.id=VALUE&shoppingCart.id=120

3. Get recommendations by relatedParty id , channel id and location id. Usually, we need to recommend specific offering when the customer's location changes.

GET /recommendation?relatedParty.id=VALUE& geographicLocation.id=120

Usage Samples

Here's an example of a request for retrieving Recommendation resources.

REQUEST

```
GET /recommendation?relatedParty.id=10023&channel.id=2053
Content-type: application/json
Accept: application/json
```

RESPONSE

```
{
  "id": "1001",
  "href": "http://serverlocation:port/recommendation/v1/recommendation/1001",
  "name": "recommendation of the latest Apple iPhone",
  "description": "recommendation of the latest Apple iPhone for the customer with high revenue contribution",
  "@type": "recommendation",
  "@schemaLocation": "http://serverlocation:port/recommendation/schema/recommendation.yml",
  "@baseType": "",
  "recommendationItem": [
    {
      "priority": 1,
      "productOffering": {
        "href": "https://host:port/productOffering/v1/productOfferings/6547",
        "id": "6547",
        "name": "phone1"
      }
    },
    {
      "priority": 2,
      "productOffering": {
        "href": "https://host:port/productOffering/v1/productOfferings/6547",
        "id": "6542",
        "name": "phone2"
      }
    }
  ],
  "validFor": {
    "startDateTime": "2017-10-9 T04:00:00.0Z",
    "endDateTime": "2017-10-9 T20:42:23.0Z"
  },
  "type": "OFFER",
  "channel": {
    "id": "2503",
    "href": "http://serverlocation:port/recommendation/v1/channel/13",
    "name": "mobile app channel"
  },
  "relatedParty": {
    "id": "10023",
    "href": "http://serverlocation:port/partyManagement/v1/individual/34",
    "name": "John Smith",
    "role": ""
  }
}
```

}

ACKNOWLEDGEMENTS

VERSION HISTORY

Version Number	Date	Modified by:	Description
Release 0.1	31/05/2017		First Release of Draft Version of the Document.
Release 0.12	12/07/2017		Update by Hongxia
1.0.0	9/10/2017		Address the comments from Orange, merge the etiya's contribution.
1.0.1	30/10/2017		Address the comments from Amdocs.
1.0.2	10-Jan-2018	Adrienne Walcott	Formatting/style edits prior to publishing

RELEASE HISTORY

Release Number	Date	Release led by:	Description
Release 17.5.0	January 2018		First Release

CONTRIBUTORS TO DOCUMENT

<ul style="list-style-type: none"> MaXu, Huawei maxu@huawei.com Hongxia Hao, Huawei haohongxia@huawei.com 	Initial version
<ul style="list-style-type: none"> Ludovic Robert ludovic.robert@orange.com Serafettin ACIR serafettin.acir@etiya.com 	Add some related information